
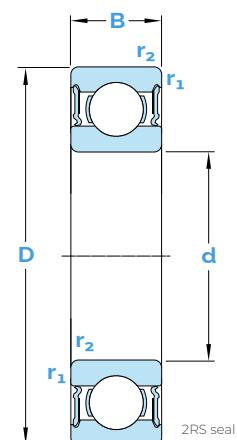
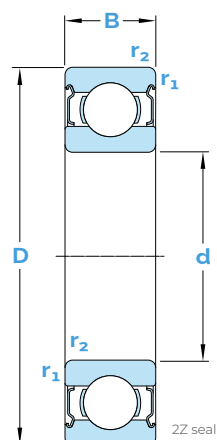


DEEP GROOVE BALL BEARINGS

6200 series

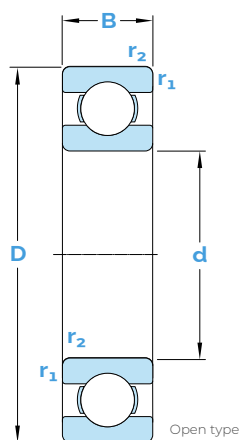

Type	d (mm)	D (mm)	B (mm)	r _{1,2} min. (mm)	Mass (kg)	Dynamic C (kN)	Static C ₀ (kN)	P ₀ (kN)	Reference speed r/min
6200	10	30	9	0.6	0.03	5.1	2.39	0.108	30000
6200/C3	10	30	9	0.6	0.03	5.1	2.39	0.108	30000
6200-2RS	10	30	9	0.6	0.03	5.1	2.39	1.054	25000
6200-2RS/C3	10	30	9	0.6	0.03	5.1	2.39	1.054	25000
6200-2Z	10	30	9	0.6	0.03	5.1	2.39	1.054	25000
6200-2Z/C3	10	30	9	0.6	0.03	5.1	2.39	0.108	25000
6201	12	32	10	0.6	0.03	6.1	2.75	0.124	26000
6201/C3	12	32	10	0.6	0.03	6.1	2.75	0.124	26000
6201-2RS	12	32	10	0.6	0.03	6.1	2.75	0.108	22000
6201-2RS/C3	12	32	10	0.6	0.03	6.1	2.75	0.108	22000
6201-2Z	12	32	10	0.6	0.03	6.1	2.75	0.108	22000
6201-2Z/C3	12	32	10	0.6	0.03	6.1	2.75	0.124	22000
6202	15	35	11	0.6	0.04	7.75	3.6	0.163	23000
6202/C3	15	35	11	0.6	0.04	7.75	3.6	0.163	23000
6202-2RS	15	35	11	0.6	0.04	7.75	3.6	0.124	19000
6202-2RS/C3	15	35	11	0.6	0.04	7.75	3.6	0.124	19000
6202-2Z	15	35	11	0.6	0.04	7.75	3.6	0.124	19000
6202-2Z/C3	15	35	11	0.6	0.04	7.75	3.6	0.163	19000
6203	17	40	12	0.6	0.06	9.6	4.6	0.209	21000
6203/C3	17	40	12	0.6	0.06	9.6	4.6	0.209	21000
6203-2RS	17	40	12	0.6	0.06	9.6	4.6	0.163	18000
6203-2RS/C3	17	40	12	0.6	0.06	9.6	4.6	0.163	18000
6203-2Z	17	40	12	0.6	0.06	9.6	4.6	0.163	18000
6203-2Z/C3	17	40	12	0.6	0.06	9.6	4.6	0.209	18000
6204	20	47	14	1	0.09	12.8	6.65	0.302	18000
6204/C3	20	47	14	1	0.09	12.8	6.65	0.302	18000
6204-2RS	20	47	14	1	0.09	12.8	6.65	0.209	16000
6204-2RS/C3	20	47	14	1	0.09	12.8	6.65	0.209	16000
6204-2Z	20	47	14	1	0.09	12.8	6.65	0.209	16000
6204-2Z/C3	20	47	14	1	0.09	12.8	6.65	0.302	16000
6205	25	52	15	1	0.11	14	7.85	0.356	15000
6205/C3	25	52	15	1	0.11	14	7.85	0.356	15000
6205-2RS	25	52	15	1	0.11	14	7.85	0.302	13000
6205-2RS/C3	25	52	15	1	0.11	14	7.85	0.302	13000
6205-2Z	25	52	15	1	0.11	14	7.85	0.302	13000
6205-2Z/C3	25	52	15	1	0.11	14	7.85	0.356	13000
6206	30	62	16	1	0.18	19.5	11.3	0.513	13000
6206/C3	30	62	16	1	0.18	19.5	11.3	0.513	13000
6206-2RS	30	62	16	1	0.18	19.5	11.3	0.356	11000
6206-2RS/C3	30	62	16	1	0.18	19.5	11.3	0.356	11000

DEEP GROOVE BALL BEARINGS

6200 series

Type	d (mm)	D (mm)	B (mm)	r _{1,2} min. (mm)	Mass (kg)	Dynamic C (kN)	Static C ₀ (kN)	P ₀ (kN)	Reference speed r/min
6206-2Z	30	62	16	1	0.18	19.5	11.3	0.356	11000
6206-2Z/C3	30	62	16	1	0.18	19.5	11.3	0.513	11000
6207	35	72	17	1.1	0.26	25.7	15.3	0.695	11000
6207/C3	35	72	17	1.1	0.26	25.7	15.3	0.695	11000
6207-2RS	35	72	17	1.1	0.26	25.7	15.3	0.513	9800
6207-2RS/C3	35	72	17	1.1	0.26	25.7	15.3	0.513	9800
6207-2Z	35	72	17	1.1	0.26	25.7	15.3	0.513	9800
6207-2Z/C3	35	72	17	1.1	0.26	25.7	15.3	0.695	9800
6208	40	80	18	1.1	0.34	29.1	17.8	0.809	10000
6208/C3	40	80	18	1.1	0.34	29.1	17.8	0.809	10000
6208-2RS	40	80	18	1.1	0.34	29.1	17.8	0.695	8700
6208-2RS/C3	40	80	18	1.1	0.34	29.1	17.8	0.695	8700
6208-2Z	40	80	18	1.1	0.34	29.1	17.8	0.695	8700
6208-2Z/C3	40	80	18	1.1	0.34	29.1	17.8	0.809	8700
6209	45	85	19	1.1	0.38	32.5	20.4	0.927	9200
6209/C3	45	85	19	1.1	0.38	32.5	20.4	0.927	9200
6209-2RS	45	85	19	1.1	0.38	32.5	20.4	0.809	7800
6209-2RS/C3	45	85	19	1.1	0.38	32.5	20.4	0.809	7800
6209-2Z	45	85	19	1.1	0.38	32.5	20.4	0.809	7800
6209-2Z/C3	45	85	19	1.1	0.38	32.5	20.4	0.927	7800
6210	50	90	20	1.1	0.43	35	23.2	1.054	8300
6210/C3	50	90	20	1.1	0.43	35	23.2	1.054	8300
6210-2RS	50	90	20	1.1	0.43	35	23.2	0.927	7100
6210-2RS/C3	50	90	20	1.1	0.43	35	23.2	0.927	7100
6210-2Z	50	90	20	1.1	0.43	35	23.2	0.927	7100
6210-2Z/C3	50	90	20	1.1	0.43	35	23.2	1.054	7100
6211	55	100	21	1.5	0.57	43.5	29.2	1.327	7600
6211/C3	55	100	21	1.5	0.57	43.5	29.2	1.327	7600
6211-2RS	55	100	21	1.5	0.57	43.5	29.2	1.054	6400
6211-2RS/C3	55	100	21	1.5	0.57	43.5	29.2	1.054	6400
6211-2Z	55	100	21	1.5	0.57	43.5	29.2	1.054	6400
6211-2Z/C3	55	100	21	1.5	0.57	43.5	29.2	1.327	6400
6212	60	110	22	1.5	0.74	52.5	36	1.636	7000
6212/C3	60	110	22	1.5	0.74	52.5	36	1.636	7000
6212-2RS	60	110	22	1.5	0.74	52.5	36	1.327	6000
6212-2RS/C3	60	110	22	1.5	0.74	52.5	36	1.327	6000
6212-2Z	60	110	22	1.5	0.74	52.5	36	1.327	6000
6212-2Z/C3	60	110	22	1.5	0.74	52.5	36	1.636	6000