
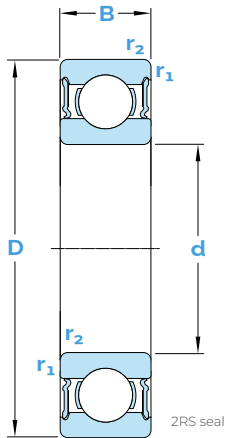
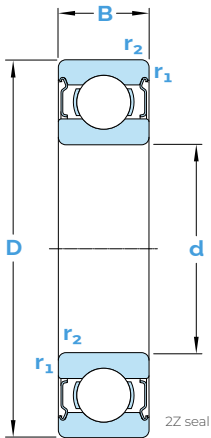


DEEP GROOVE BALL BEARINGS
Miniature

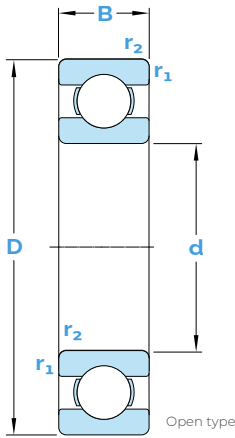

Type	d (mm)	D (mm)	B (mm)	r _{1,2} min. (mm)	Mass (kg)	Dynamic C (kN)	Static C ₀ (kN)	Limiting speed r/min	Reference speed r/min
608	8	22	7	0.3	0.015	2.53	1.36	34000	26000
608/C3	8	22	7	0.3	0.015	2.53	1.36	34000	26000
608-2RS	8	22	7	0.3	0.015	2.53	1.36	34000	26000
608-2RS/C3	8	22	7	0.3	0.015	2.53	1.36	34000	26000
608-2Z	8	22	7	0.3	0.015	2.53	1.36	34000	26000
608-2Z/C3	8	22	7	0.3	0.015	2.53	1.36	34000	26000
625	5	16	5	0.3	0.005	1.13	0.56	40000	32000
625-2RS	5	16	5	0.3	0.005	1.13	0.56	40000	32000
625-2Z	5	16	5	0.3	0.005	1.13	0.56	40000	32000
625-2Z/C3	5	16	5	0.3	0.005	1.13	0.56	40000	32000
626	6	19	6	0.3	0.008	2.01	1.05	36000	28000
626/C3	6	19	6	0.3	0.008	2.01	1.05	36000	28000
626-2RS	6	19	6	0.3	0.008	2.01	1.05	36000	28000
626-2RS/C3	6	19	6	0.3	0.008	2.01	1.05	36000	28000
626-2Z	6	19	6	0.3	0.008	2.01	1.05	36000	28000
626-2Z/C3	6	19	6	0.3	0.008	2.01	1.05	36000	28000
627	7	22	7	0.3	0.015	2.53	1.36	34000	26000
627-2RS	7	22	7	0.3	0.015	2.53	1.36	34000	26000
627-2RS/C3	7	22	7	0.3	0.015	2.53	1.36	34000	26000
627-2Z	7	22	7	0.3	0.015	2.53	1.36	34000	26000
627-2Z/C3	7	22	7	0.3	0.015	2.53	1.36	34000	26000
629	9	26	8	0.5	0.019	3.52	1.95	30000	22000
629/C3	9	26	8	0.5	0.019	3.52	1.95	30000	22000
629-2RS	9	26	8	0.5	0.019	3.52	1.95	30000	22000
629-2RS/C3	9	26	8	0.5	0.019	3.52	1.95	30000	22000
629-2Z	9	26	8	0.5	0.019	3.52	1.95	30000	22000
629-2Z/C3	9	26	8	0.5	0.019	3.52	1.95	30000	22000